

FTTH-Splitter Module

Description

The FTTH-08VM5 from is specialized designed for FTTx application.

The product adopts **fully-mechanical sealing structure**. It can be used for straight-through and branching-off application, as well as passive optical fiber distribution.

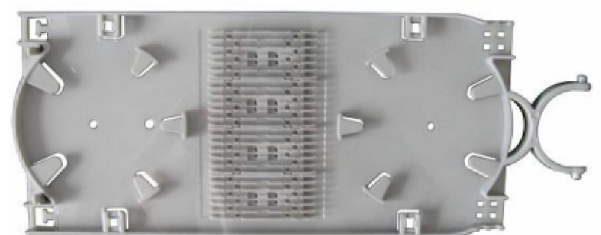
Features

- Made from engineering plastic with high strength and anti-corrosion.
- available 2 pcs of 1x16 or 2x16 or 1 pcs of 1x32 or 2x32 splitter.
- Suitable for wall-mounting or pole mounting application
- 1 pcs of large round port for uncut cable and 4 pcs of small round port
- suitable for module type of PLC splitter with SC connector or LC connector, etc
- Suitable for SC, or LC connect or customerized
- Sealing method: **mechanical sealing type**
- dimension (HxD): 510x230mm

Application

- FTTH, FTTB, FTTC
- Telecommunication Network

- CATV
- Local Area Network





Sealing System



Please kindly note: sealing Ring can be done according to your requirement of the cable

Ordering information

Fiber Optic Splice Tray (FOST)	Max. 3 pieces of FOST 8524B with 24 fibers per tray	
Max. Capacity (fibers)	72 fibers	
Type of PLC	tube type or module type	
	4 pcs 1x8 2 pcs 1x16 or 2x16 1 pcs 1x32 or 2x32	
Type of Adapter	36 pcs of SC or duplex LC	
Dimension (HxD)mm	510x230	
Cable Entry	4 small round ports with $\Phi 21.50\text{mm}$	<p>OR for multiple cable entry</p>  <p>for 4 pcs of $\Phi 5.0\text{-}7.0\text{mm}$ lead-in cable for 8 pcs of $\Phi 3.0\text{mm}$ indoor cable, or drop cable (3.0×2.0 or 5.2×2.0) etc <u>or customized sealing system is possible</u></p>
	1 large round port for 1 pcs uncut cable	<p>OR for multiple cable entry</p>  <p>for 16 pcs of $\Phi 5.0\text{-}7.0\text{mm}$ lead-in cable <u>or customized sealing system is possible</u></p>