


FTTH Terminal Cable

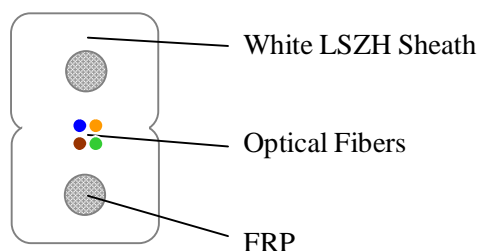

Fiber Count	1 / 2 / 4			
Attenuation G.652D, G.657 (dB/km) @1310/1550nm	0.4 / 0.25			
Attenuation A1a @850/1300 nm	3.5 / 1.5			
Optical Fiber Color	TIA/EIA 598 (Blue, Orange, Green, Brown)			
Sheath Color	White			
Diameter (mm)	2.0 x 3.2 (± 0.2)			
Weight (kg/km)	9.000			
Tensile Strength (N)	Long Term	40		
	Short Term	80		
Crush Resistance (N/100mm)	Long Term	1000		
	Short Term	2000		
Bend Radius (mm)	Static	15 (G.652D)	10 (G.657A)	7.5 (G.657B)
	Dynamic	30 (G.652D)	20 (G.657A)	15 (G.657B)
Operating Temperature (°C)	- 20 ~ + 60			

Features:

- Ø Easily strip each unit and easily separate the fiber from the sheath;
- Ø Simple structure, light weight and high practicability;
- Ø Novel flute design easily strip and splice, simplify the installation and maintenance;
- Ø Two parallel FRP strength members ensure good performance of crush and tension resistance to protect the fiber;
- Ø If G.657 fiber be put in the cable, ensure the very good bending performance. (Bend radius 10mm/G.657A, Bend radius 7.5mm/G.657B);
- Ø Low smoke, zero halogen and flame retardant sheath.