


Multi Loose Tube FOC, Jelly Filled, MDPE Sheath

Cable Cross-Section

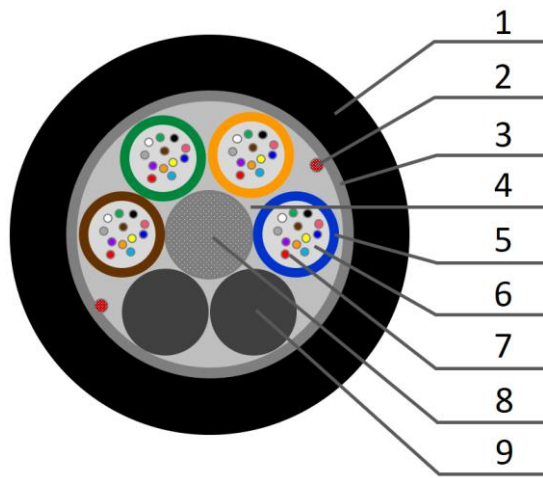

Cable Structure

1. Outer PE Sheath
2. Ripcord
3. Polyester Tape
4. Cable Jelly
5. Loose Tube (PBT)
6. Tube Filling Compound (thixotropic gel)
7. Optical Fibers (SM G.652D)
8. Central Strength Member
9. PE Filler

Cable Specification

Number of Fibers		12F	24F	48F	72F
Optical Fiber		ITU-T G.652D Sumitomo PureBand			
Fiber type		ITU-T G.652D Sumitomo PureBand			
Loose Tube					
Number		1 x 12F, 2 x 6F	2 x 12F, 4 x 6F	4 x 12F	6 x 12F
Filling material		Thixotropic Jelly			
Tube material		PBT			
Tube diameter		2,25 ± 0,05 mm			
Central Strength Member					
Material		FRP			
Diameter		2,5 ± 0,1mm			
Core Wrapping		Polyester Tape			
Peripheral Strength Member		E-Glass yarn			
Outer sheath					
Material		MDPE			
Thickness		1,5 ± 0,1 mm			
Nom. Cable					
Diameter (mm)		11,4	11,4	11,4	11,4
Net weight (kg/km)		91	92	93	95
Drum length (m)		2000 ± 5%			

Color Details

No.	1	2	3	4	5	6	7	8	9	10	11	12	
Fiber Color	12	Blue	Orange	Green	Brown	Slate	White	Red*	Black*	Yellow	Violet*	Pink*	Aqua*
	24	Blue	Orange	Green	Brown	Slate	White	Red*	Black*	Yellow	Violet*	Pink*	Aqua*
	48	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Pink	Aqua
	72	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Pink	Aqua
Tube Color	12	Blue	Orange*										
	24	Blue	Orange	Green*	Brown*								
	48	Blue	Orange	Green	Brown								
	72	Blue	Orange	Green	Brown	Slate	White						
Sheath Color	Black UV												
Marking	0000M	KST Ltd. YYYY			Duct	Drum No.		Sumitomo G.652D			0001M		

Mechanical & Environmental Characteristics

Test	Test Standards	Specified Value	
Optical Attenuation	- 1310nm	IEC 60793-1-40	≤ 0.36 dB/km
	- 1550nm	IEC 60793-1-41	≤ 0.22 dB/km
Tensile Strength	- Short Term	IEC 60794-1-2-E1	Max. 2500N
	- Long Term	IEC 60794-1-2-E2	Max. 1500N
Crush Resistance	IEC 60794-1-2-E3	150N/cm	
Min. Bending Radius	- Static	IEC 60794-1-2-E11	20 x D
	- Dynamic	IEC 60794-1-2-E12	15 x D
Impact Resistance	IEC 60794-1-2-E4	4,4 Nm	
Torsion	IEC 60794-1-2 E7	± 180°	
Temperature Range (°C)	- Installation	IEC 60794-1-2-F1	- 10°C to + 60°C
	- Operation	IEC 60794-1-2-F1	- 40°C to + 70°C

D : Cable outer diameter

Packing :

- ❖ Non-returnable wooden drum
- ❖ Strong wooden batten protection
- ❖ Cable ends are accessible for a test



KST Ltd.

Address: 357 Slivnitsa Blvd.,
Sofia, Bulgaria

Tel: +359 2 927-72-56
Fax: +359 2 927-00-14

Web: www.kst-bg.com
E-mail: sales@kst-bg.com