

RTF Series Instruction Sheet



Warning! This tool should not be used on live electrical circuits. It is not protected against electrical shock! Always use CE/OSHA/ANSI or other industry approved eye protection when using tools. This tool is not to be used for purposes other than intended. Read carefully and understand instructions before using this tool.

The RTF Series of Torque Tools are available in four standard torque settings 1.1Nm(10lb-in), 2.5Nm(22lb-in),3.4Nm(30lb-in) and 3.8Nm(33lb-Nm).With two interchangeable 7/16”F” series split socket shafts, 100mm(4in) and 210mm(8 1/2in) available. The torque settings are pre set and are functional during install and will ” click” then slip slightly when the pre set torque is reached. On de-install you have 100% positive action.

The interchangeable hexagonal shafts must be pushed into the handle firmly and are retained in the handle with a spring loaded ball for retention.


Removal direction 100% torque

Installation direction Pre Set Torque

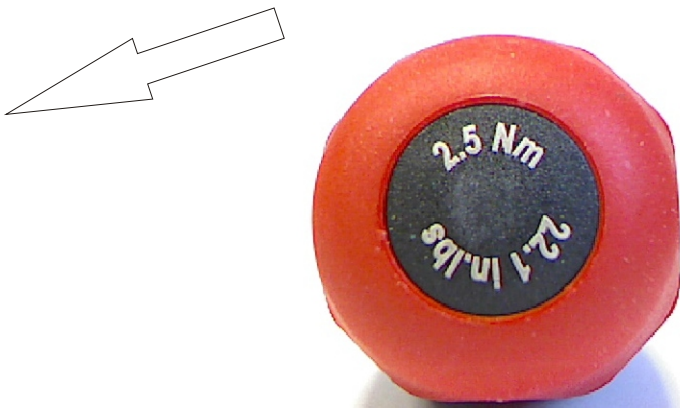

The fixed pre set Torque size can be found on the butt of the handle.

The Handle also incorporates two flats that will accept a 24mm spanner if extra pressure is required.

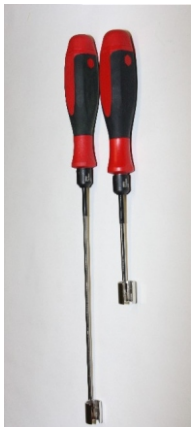

Type	Torque Nm	Torque lb/in	Part No	Size	Weight
RTF-716-1.1 Long	1.1Nm Torque	10lb/in Torque	#43079	310mm/12”	145g
RTF-716-1.1 Short	1.1Nm Torque	10lb/in Torque	#43078	210mm/8”	133g
RTF-716-2.5 Long	2.5Nm Torque	22lb/in Torque	#43081	310mm/12”	145g
RTF-716-2.5 Short	2.5Nm Torque	22lb/in Torque	#43080	210mm/8”	133g
RTF-716-3.4 Long	3.4Nm Torque	30Lb/in Torque	#43186	310mm/12”	145g
RTF-716-3.4 Short	3.4Nm Torque	30Lb/in Torque	#43185	210mm/8”	133g
RTF-716-3.8 Long	3.8Nm Torque	33lb/in Torque	#43086	310mm/12”	145g
RTF-716-3.8 Short	3.8Nm Torque	33lb/in Torque	#43085	210mm/8”	133g
RTF 716-L Shaft 30cm			#43088	300mm/12”	42g
RTF 716-S Shaft 20cm			#43087	200mm/8”	30g
RTF716-1.1 Torque Handle			#43180	130mm/5”	103g
RTF716-2.5 Torque Handle			#43082	130mm/5”	103g
RTF716-3.4 Torque Handle			#43187	130mm/5”	103g
RTF716-3.8 Torque Handle			#43083	130mm/5”	103g

This Tool is maintenance free and has no user adjustable parts.Keep the tool as clean as possible and do not submerge in any liquids as this may effect the tools functon.

WARRANTY: RIPLEY warrants its products against defective materials and workmanship for a period of one year from date of shipment from the RIPLEY factory provided the product is utilized in accordance with instructions and specified ratings. This does not effect your statutory rights.



46 Nooks Hill Road
Cromwell, CT 06416
Phone: 800-528-8665
Int'l: (01) 860-635-2200
Fax: (01) 860-635-3631
E-mail: info@ripley-tools.com
Internet: www.ripley-tools.com

Ripley Europe Ltd
Building 47, Bay 4, Second Avenue,
The Pensnett Estate, Kingswinford
West Midlands, England, DY6 7UZ.
Phone: +44(0)1384400070
Fax: +44(0)1384400060



P/N
43084
-----DATE-----
27-06-13 DG