


FTTx FOC, MDPE Sheath, 2 x 2.00mm FRP

Cable Cross-Section

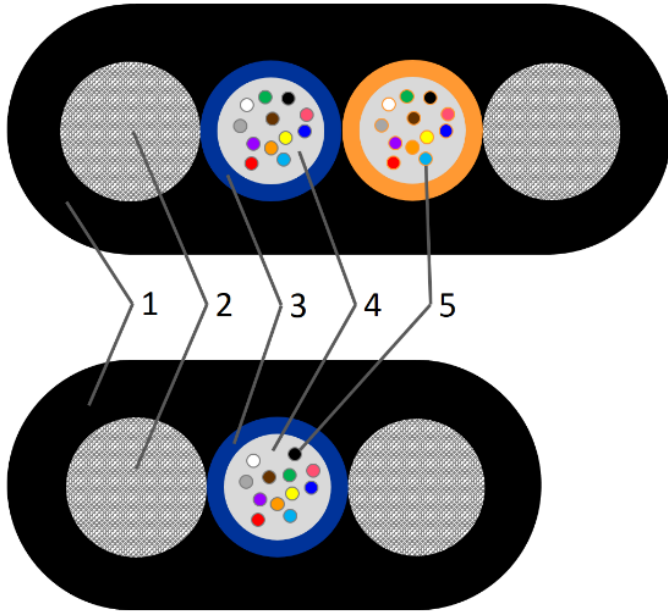

Cable Structure

1. Outer PE Sheath
2. Strength Members
3. Loose Tube (PBT)
4. Tube Filling Compound (thixotropic gel)
5. Optical Fibers (SM G.652D)

Cable Specification

Number of Fibers		4F	8F	12F	24F
Optical Fiber		ITU-T G.652D Sumitomo PureBand			
Loose Tube		Thixotropic Jelly			
	Number	1 x 4F	1 x 8F	1 x 12F	2 x 12F
	Filling material	Thixotropic Jelly			
	Tube material	PBT			
	Tube diameter	2,00 ± 0,05 mm			
Peripheral Strength Member		FRP			
	Material	FRP			
	Diameter	2,00 ± 0,1mm			
Outer sheath		MDPE Black			
	Material	MDPE Black			
	Thickness	1,0 ± 0,1 mm			
Nom. Cable		2000 ± 5%			
	Diameter (mm)	8,4 x 4,0 ± 0,4	8,4 x 4,0 ± 0,5	8,4 x 4,0 ± 0,4	10,4 x 4,0 ± 0,5
	Net weight (kg/km)	33	34	35	45
	Drum length (m)	2000 ± 5%			

Color Details

No.	1	2	3	4	5	6	7	8	9	10	11	12
Fiber Color	4	Blue	Orange	Green	Brown							
	8	Blue	Orange	Green	Brown	Slate	White	Red	Black			
	12	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Pink
Tube Color	12	Blue										
	24	Blue	Orange									
Sheath Color	Black UV											
Marking	0000M	KST Ltd.	YYYY	Aerial	Drum No.	Sumitomo G.652D	0001M					

Mechanical & Environmental Characteristics

Test	Test Standards	Specified Value	
Optical Attenuation	- 1310nm	IEC 60793-1-40	≤ 0.36 dB/km
	- 1550nm	IEC 60793-1-41	≤ 0.22 dB/km
Tensile Strength	- Short Term	IEC 60794-1-2-E1	Max. 2000N
	- Long Term	IEC 60794-1-2-E2	Max. 1200N
Crush Resistance	IEC 60794-1-2-E3	200N/cm	
Min. Bending Radius	- Static	IEC 60794-1-2-E11	20 x D
	- Dynamic	IEC 60794-1-2-E12	15 x D
Impact Resistance	IEC 60794-1-2-E4	5 Nm	
Torsion	IEC 60794-1-2 E7	± 180°	
Temperature Range (°C)	- Installation	IEC 60794-1-2-F1	- 10°C to + 60°C
	- Operation	IEC 60794-1-2-F1	- 40°C to + 70°C

D : Cable outer diameter

Packing :

- ❖ Non-returnable wooden drum
- ❖ Strong wooden batten protection
- ❖ Cable ends are accessible for a test



KST Ltd.

Address: 357 Slivnitsa Blvd.,
Sofia, Bulgaria

Tel: +359 2 927-72-56
Fax: +359 2 927-00-14

Web: www.kst-bg.com
E-mail: sales@kst-bg.com