

Splice closure GJS03-M3AX 264

Product Information

This product is used to connect the distribution cable and the incoming cable, is widely applied in communication, network systems, CATV cable TV and so on. It adopts scientifically formulated engineering plastic and be shaped by injection molding, with anti-aging, anti-corrosion, flame retardant, waterproof, anti-vibration and anti-shock effects. Can effectively prevent the optic fibers from the influence of outdoor environment.

Dome-to-base design; up to 12 pieces splice trays with excessive loose buffer storage basket, hinge for access of any splice without disturbing others trays; Fast and reliable sealing performance, easy to package multiple times. With lightning protection grounding device, it can be applied in overhead, wall mounting or directly buried

Features



- ❖ Up to 264 fibers splice capacity
- ❖ 1 oval and 5 round entry ports
- ❖ IP 68
- ❖ Loose buffer storage basket

Technical parameters




Parameter	Unit	Specification
Working Temperature	C	-40 ~ +65
Atmosphere pressure	Kpa	62~106
Axial Tension	N/1min	>1000
Flatten Resistance		2000N/100 mm (1min)
Insulation resistance	MΩ	>2*104
Voltage Strength		15KV(DC)/1min, no arc over or breakdown
Temperature recycle		under -40°C~+65°C, with 60(+5)Kpa inner pressure, in 10cycles; Inner pressure shall decrease less than 5 Kpa when closure turn to normal temperature
Durability	Years	25

Technical specification

Parameter	Specification
Size	587*261mm
Entry ports	1 oval (77.7mm*42.7mm), 5 round (21.7mm)
Cable diameters	Oval port: 2 x 10-35mm, Round ports 6-21mm each
Base sealing method	Heat-shrink
Raw material	Dome, Base : modified PP, clamp : Nylon +GF Tray: ABS Metal parts : Stainless steel
Splice trays	11 x 24 fibers
Two types available	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>C2</p>  </div> <div style="text-align: center;"> <p>S2</p>  </div> </div>

Structure diagram:

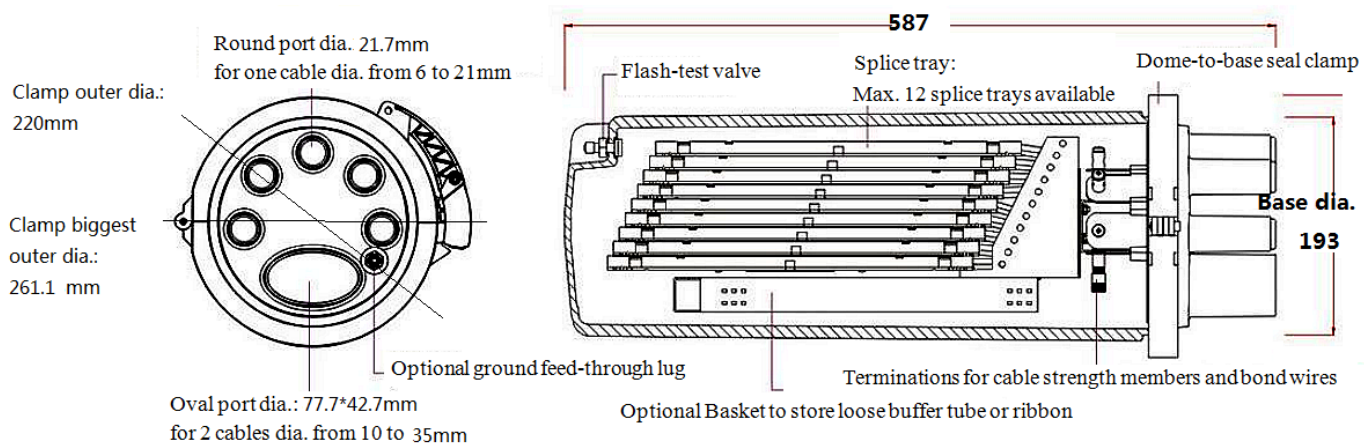

KST Ltd.

Address: 357 Slivnitsa Blvd.,
Sofia, Bulgaria

Tel: +359 2 927-72-56
Fax: +359 2 927-00-14

Web: www.kst-bg.com
E-mail: sales@kst-bg.com